

# Classic L8



## On Line Booth for manual coating


The manual coating booth Classic L8 is designed for double-sided manual coating with a conveyor system. This booth can be used for a basic automatic application as well.

### **The advantages of the Classic L8 at a glance:**

- Powder coated steel booth
- Stainless steel booth floor
- Integrated illumination
- 2 Exhaust air units
- 2 Electrical/ Pneumatic control units
- 2 mobile 80 l powder collecting hoppers
- Service doors for simplified filter cartridge changing
- Supervision of minimal exhaust air volume

Your global partner for high quality powder coating



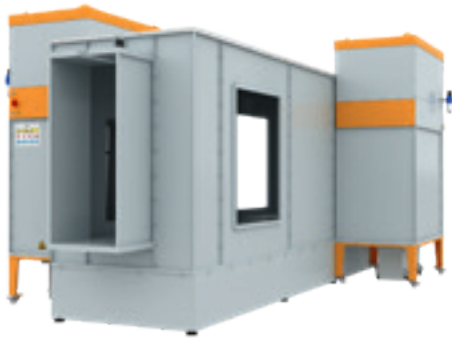

## Technical Specification

Standard version

Exhaust air volume:      nominal:            2 x 6600 m<sup>3</sup>/h  
    working range:    2 x 5500 - 6300 m<sup>3</sup>/h

Filter:                            2 x 4 Filter cartridges  
 Filter surface:                2 x 60 m<sup>2</sup>  
 Filter cleaning system:    Jet with venturi

Electrical power:            2 x 4,0 kW, 3 x 380 - 420 V, 50 Hz

Air consumption:            - with powder collecting hoppers: 2 x 15 Nm<sup>3</sup>/h max.  
    - with fluidized powder hoppers: 2 x 50 Nm<sup>3</sup>/h max.

Option:                            40 l powder hopper, fluidized  
    incl. vibrating sieve

### Dimensions:

A:    min. 200  
 B:    1400 / 1800 mm  
 H2:   min. 100 mm  
 H3:   min. 300 mm  
 L1:    600, if H1 ≤ 1400 mm  
       1300, if H1 > 1400 mm

Other dimensions on request


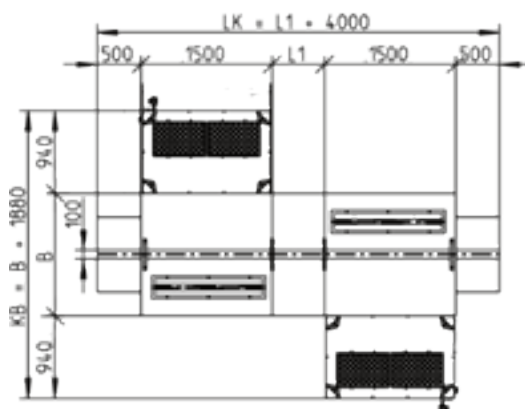


Abbildung symbolisch!

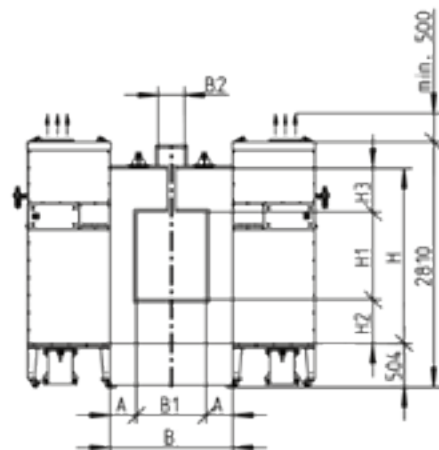

Gema Switzerland reserves the right to make technical changes without notice!

**Gema Switzerland GmbH**

Sommeraustrasse 5 | 9200 Gossau | Switzerland  
 T +41 71 313 83 00 | www.gemapowdercoating.com

